


**ENV 4001: ENVIRONMENTAL SYSTEMS ENGINEERING**

Fall 2021  
 Problem set #2  
 Finish by Wednesday, September 15

University of South Florida  
 Civil & Environmental Eng.  
 Prof. J.A. Cunningham

This problem set will not be collected or graded. Your reward for completing this problem set is that it is essential for learning the course material and passing the quizzes and final exam.

- This semester, we will see the use of clarifiers and sedimentation basins to settle suspended solids out of liquid streams. Usually, the sludge that comes from the bottom of a clarifier is sent to a belt press filter to further dewater the sludge. Consider the following process diagram.

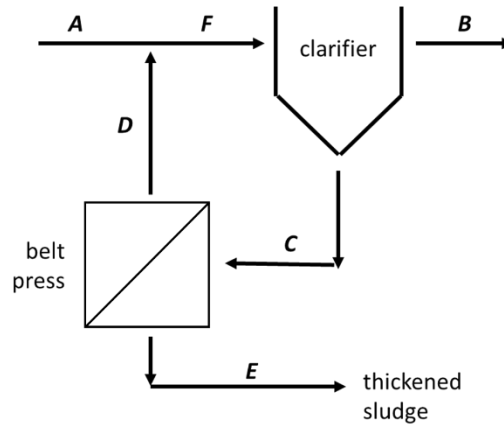


The table below gives the *volumetric flow rate* and the *concentration of suspended solids* in some of the streams shown in the diagram. You may assume that the density of every stream is the same ( $1000 \text{ kg/m}^3$ ); this assumption is not perfect, but it is close enough.

Stream	Flow rate (L/s)	Solids conc. (mg/L)
A	100	2,500
B	97	5
C		9,500
D	30	
E		
F		

Your job is to complete the table by estimating/calculating the remaining flow rates and solids concentrations.

2. Municipal wastewater (sewage) is usually treated by a method called “activated sludge.” We’ll learn more about that later in the semester. Below is a schematic diagram that shows the process.

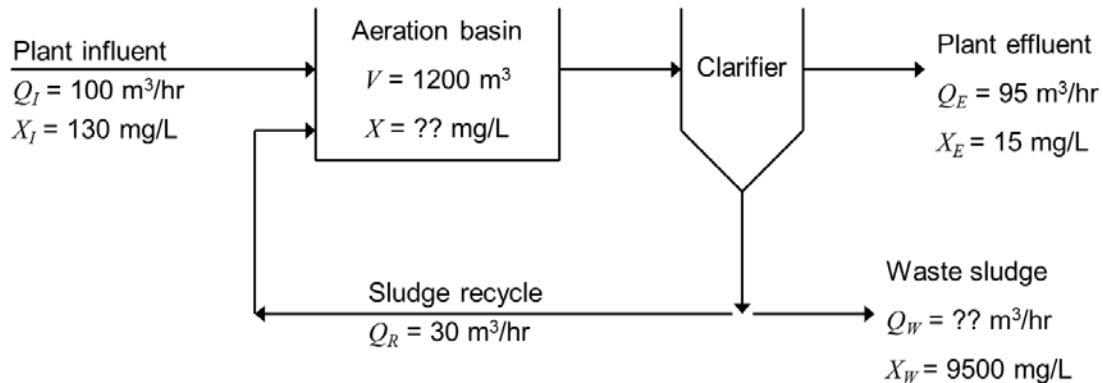

The *aeration basin* is a completely-mixed flow reactor (CMFR) where the sewage is degraded by bacteria. The bacteria grow rapidly in the aeration basin as they degrade the sewage. Therefore, the aeration basin has a high concentration of suspended solids; we use the symbol  $X$  to indicate the concentration of suspended solids (bacteria) in the aeration basin. Because we don’t want to release a lot of bacteria into the environment, the effluent from the aeration basin goes to a *clarifier*. In the clarifier, the suspended solids settle to the bottom under the influence of gravity. Therefore, the plant effluent that comes out of the top of the clarifier has a low concentration of suspended solids (denoted  $X_E$ ). The sludge that comes out the bottom of the clarifier has a very high concentration of suspended solids. A fraction of the sludge is recycled to the aeration basin, and the remainder is disposed of as waste sludge. The waste sludge has a flow rate  $Q_W$  and a suspended solids concentration  $X_W$ .

For the purposes of this problem, you may assume that all the streams have the same density,  $\rho = 1000 \text{ kg/m}^3$ . (In fact the sludge density is probably higher, but we’ll ignore that here.) You may also assume that the system is at steady state, and that the values of  $V$ ,  $Q_I$ ,  $Q_E$ ,  $Q_R$ ,  $X_I$ ,  $X_W$ , and  $X_E$  are all as indicated on the figure.

- What is the flow rate of the waste sludge stream,  $Q_W$ ?
- What is the concentration of suspended solids in the recycle stream,  $X_R$ ? Hint: no calculations are required!
- What is the concentration of suspended solids exiting the aeration basin,  $X$ ? Hint: in the aeration basin, bacteria grow and die, so if you write a material balance for the mass of solids in the aeration basin, you *cannot* assume that production and consumption terms are zero. You might have to try something else....
- What is the rate of production of solids within the aeration basin, in units of kg/hr? (This is how fast the bacteria grow in the aeration basin.)

Hint: You can answer all of these by performing the proper material balances around the proper control volumes. In my opinion, part (c) is the trickiest because it is not obvious what control volume to use.

3. Answer problem 4.2 in your text book.
  
4. Answer problem 4.4 (“the spy problem”) in your text book. Hint: you can assume that gas exits the room at the same rate it enters. (Sometimes students read this problem and assume that there is no gas flow out – that is not the case.)
  
5. This problem is based on a problem from the text book *Principles of Environmental Engineering and Science* by Davis and Masten.
  - (a) A lagoon for treating sewage has a surface area of 10 ha and a depth of 1 m. It processes 8640 m<sup>3</sup>/d of sewage, which contains 100 mg/L of BOD. (Note: BOD is a measure of how much nasty stuff is in the sewage...we’ll cover BOD in more detail later.) The effluent from the lagoon should not exceed 20 mg/L of BOD. Assuming that the lagoon is well mixed, what reaction rate coefficient must be achieved in order to meet the effluent standard? You may assume first-order kinetics. Be sure to report the units on the rate coefficient.
  - (b) Now imagine that, instead of one lagoon with surface area 10 ha, you have two lagoons each with surface area 5 ha. Sewage is treated by the two lagoons in series, i.e., first through one lagoon, then through the other. The effluent from the second lagoon must not exceed 20 mg/L. Now what reaction rate coefficient must be achieved? (You may assume the same rate coefficient applies in both lagoons.)
  - (c) Still consider that you have the two lagoons in series, as you had in part (b). Still consider that the two lagoons are treating 8640 m<sup>3</sup>/d of sewage with an influent concentration of 100 mg/L BOD. However, now use your reaction rate constant from part (a). What will be the effluent concentration from the second lagoon?
  - (d) Compare your answer in part (c) to the effluent standard of 20 mg/L that you achieved with the single lagoon in part (a). Which system is more efficient: a single lagoon with a surface area of 10 ha, or two lagoons in series with areas of 5 ha each? One might expect the two systems to be equally efficient – after all, the total surface area and the total residence time is the same in each case – so how do you explain the fact that one system is more efficient than the other?
  
6. What reactor volume is required for a CMFR to achieve 95% efficiency assuming a flow rate of 14 m<sup>3</sup>/d and a first-order reaction rate constant of 0.05 d<sup>-1</sup>? You may assume steady state. What reactor volume is required for a PFR to achieve 95% efficiency under the same conditions? Which one requires a larger reactor volume? Why?

7. Answer problem 4-15 in your text book. What assumption must you make about the river to solve this problem?
  
8. (I think I read this problem somewhere else, but I can't remember where. I would like to give proper credit to the source, but I don't remember what it was. Possibly the text book by Davis and Masten? – but I am not sure.)  
Radon in people's basements is a problem in some areas of the US. (Not in Florida, because we don't have basements!) Consider a 90-m<sup>3</sup> basement that is found to be contaminated with radon; the radon is coming from the ground through the floor drains. The concentration of radon in the room is 1500 Bq/m<sup>3</sup>. Assume that the air in the room is well mixed, and that radon undergoes first-order decay with a rate constant of  $2.09 \times 10^{-6} \text{ s}^{-1}$ . If the source of the radon is closed off, and the room is ventilated with clean (radon-free) air at a rate of 0.14 m<sup>3</sup>/s, how long will it take to lower the radon concentration to an acceptable level of 150 Bq/m<sup>3</sup>? Hint: because the room is ventilated, you can treat it as a completely mixed flow reactor.
  
9. Look up two of the Sustainable Development Goals that seem like they would be particularly relevant for ENV 4001. Write down the number and the title (e.g., Goal 4, "Quality Education") of these two SDGs. Then, look up the brief description of these two goals and write those down too (e.g., "Ensure inclusive and quality education for all and promote lifelong learning"). Try to memorize the numbers, the names of the goals, and the brief description of the goals.